


ACO Building Drainage | Stainless



MOD200 D200 Outlet Channels



Center Outlet Channels

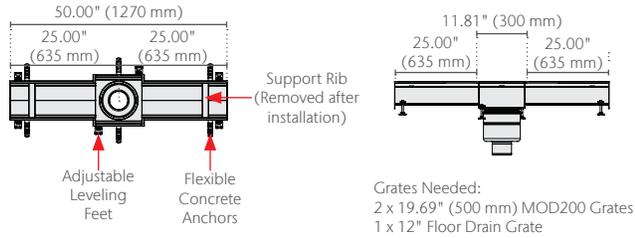

End Outlet Channels

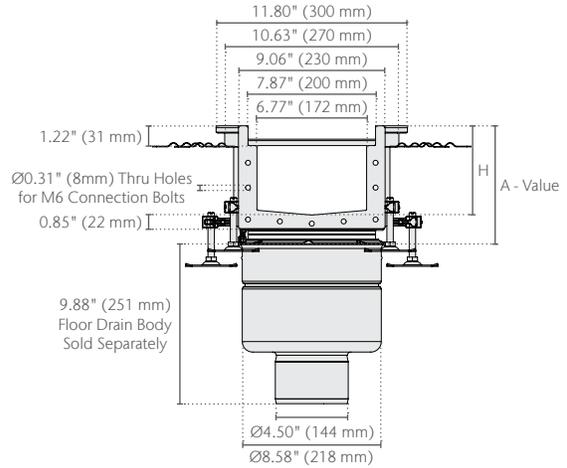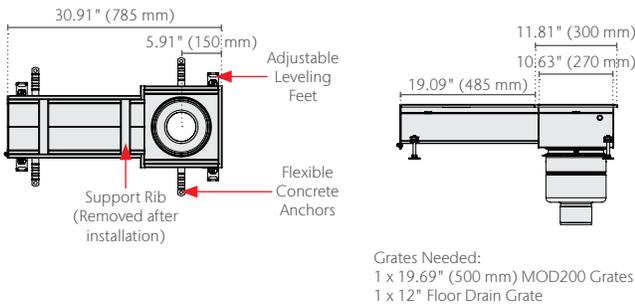

Parts	Invert Depths in (mm)	Material
A- Table	2.36 (60)	A = 3.50 - 4.61 (89-117)
	2.76 (70)	A = 3.90 - 5.00 (99-127)
	3.15 (80)	A = 4.29 - 5.39 (109-137)
	3.54 (90)	A = 4.69 - 5.79 (119-147)
	3.94 (100)	A = 5.08 - 6.18 (129-157)
	4.33 (110)	A = 5.47 - 6.57 (139-167)
	4.72 (120)	A = 5.87 - 6.97 (149-177)*
	5.51 (140)	A = 6.65 - 7.76 (169-197)

*Most Common
Using mechanical clamping flange minimum installation value increase by 0.31" (8 mm)

Parts	Part No.	Material	H	Weight lbs	Parts	Part No.	Material	H	Weight lbs
Center Outlet Channels	414243	AISI 304	2.36 (60)	17.0	End Outlet Channels	414259	AISI 304	2.36 (60)	11.2
	414244	AISI 304	2.76 (70)	17.6		414260	AISI 304	2.76 (70)	11.9
	414245	AISI 304	3.15 (80)	18.3		414261	AISI 304	3.15 (80)	12.4
	414246	AISI 304	3.54 (90)	19.2		414262	AISI 304	3.54 (90)	12.8
	414247	AISI 304	3.94 (100)	19.8		414263	AISI 304	3.94 (100)	13.5
	414248	AISI 304	4.33 (110)	20.7		414264	AISI 304	4.33 (110)	13.9
	414249	AISI 304	4.72 (120)	21.6		414265	AISI 304	4.72 (120)	14.6
	414250	AISI 304	5.51 (140)	22.7		414266	AISI 304	5.51 (140)	15.4
	414251	AISI 316L	2.36 (60)	17.0		414267	AISI 316L	2.36 (60)	11.2
	414252	AISI 316L	2.76 (70)	17.6		414268	AISI 316L	2.76 (70)	11.9
	414253	AISI 316L	3.15 (80)	18.3		414269	AISI 316L	3.15 (80)	12.4
	414254	AISI 316L	3.54 (90)	19.2		414270	AISI 316L	3.54 (90)	12.8
	414255	AISI 316L	3.94 (100)	19.8		414271	AISI 316L	3.94 (100)	13.5
	414256	AISI 316L	4.33 (110)	20.7		414272	AISI 316L	4.33 (110)	13.9
414257	AISI 316L	4.72 (120)	21.6	414273	AISI 316L	4.72 (120)	14.6		
414258	AISI 316L	5.51 (140)	22.7	414274	AISI 316L	5.51 (140)	15.41		

Specification Summary


ACO Modular 200 outlet channels. Overall height varies, see tables. Used with ACO 12" Floor Drains and 12" Floor Drain grates. Made from 16 ga (1.5 mm) AISI 304 or AISI 316L, pickle passivated finish. All channels provided with NBR seal and connection bolts on one side. Multiple grate options available.

ACO recommends checking local plumbing codes prior to installation.

ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com
www.acousa.com

