


Type 676D Longitudinal Ductile Iron Grate Spec Sheet



Type 676D Longitudinal Ductile Iron Grate

part no. 142173

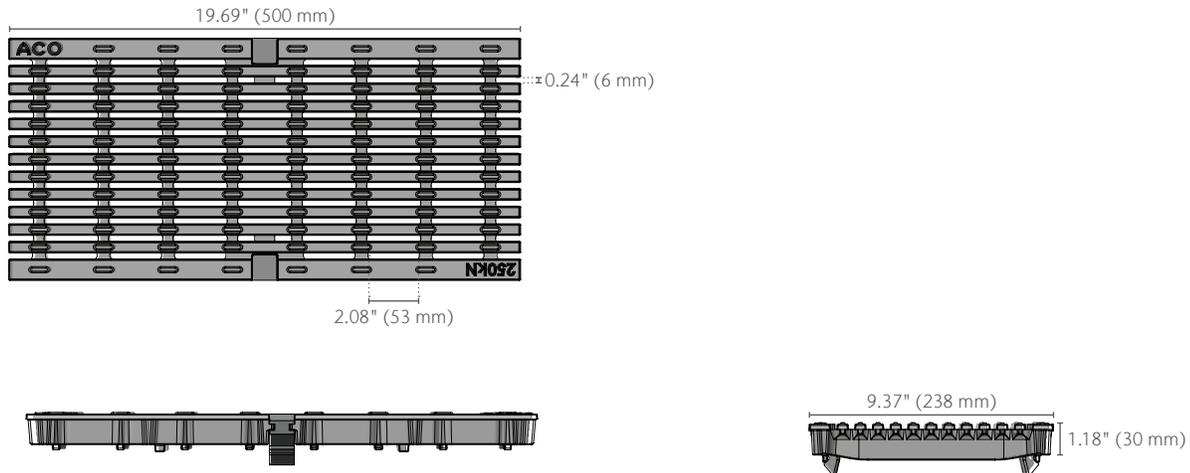

Product Name

Type 676D Longitudinal Ductile Iron Grate


Part No.	Length in (mm)	Width in (mm)	Weight lbs
142173	19.69 (500)	9.37" (238)	19.0

Type 676D Longitudinal Ductile Iron Grate Spec Sheet



DrainLok Locking Mechanism

ACO DrainLok is a patented, boltless locking system that removes the need for bolts and bars while improving the hydraulic capacity of the channel. DrainLok Clips lock into the channel's edge rail for rapid installation. ACO DrainLok grates are fitted with an anti-shunt mechanism that restricts unwanted grate movement when installed, improving durability and longevity of the system.

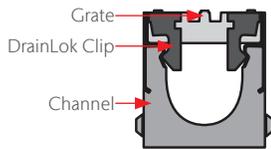

Specification Summary

General

The surface drainage system shall be ACO Drain K200, KS200, and H200K-13 channels, complete with ACO Type 676D Longitudinal Ductile Iron grate with DrainLok locking as manufactured by ACO, Inc. or similar approved.

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Materials

The grates shall be manufactured from ductile iron and have minimum properties as follows:

- Ductile iron to ASTM A536 - Grade 80-55-06
- Intake area of 46.0 in² (296.9 cm²) per half meter of grate grate

The overall width of 9.37" (238 mm) and overall length of 19.69" (500 mm). Slots measure at 0.24" (6 mm) by 2.08" (53 mm).



ADA-compliant per The Americans with Disabilities Act of 2010, Section 302.3



ASME: A112.6.3 : Section 7.12
Heel-resistant Strainers & Grates
grate hole size ≤ 0.31" (8 mm)



ACO Heel-safe standard:
grate hole size ≤ 0.25" (6.5 mm)



Australian Standard AS 3996 - 2006 Clause 3.3.6:
max slot length dependent on slot width for grates that are deemed Bicycle Tire Penetration Resistant.




EN 1433 Load Class C
56,202 lbs — 1,160 psi

ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com
www.acousa.com

