

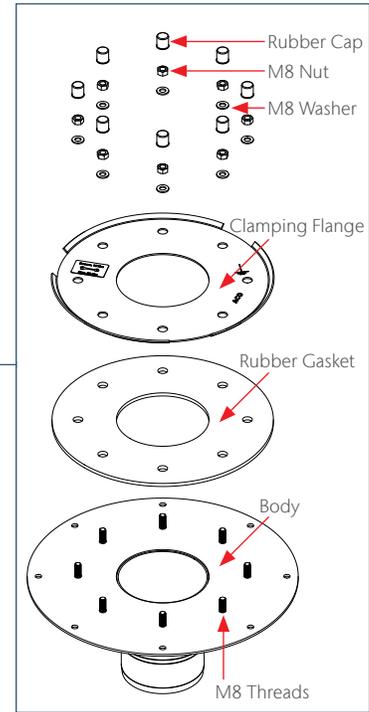


Membrane No-Hub Drain - Stainless Steel

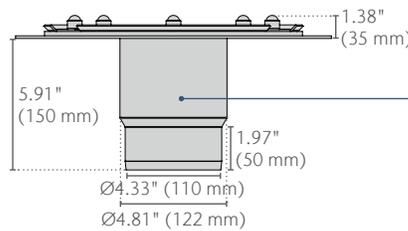

Membrane No-Hub Drain - Stainless Steel

Part No. 01043

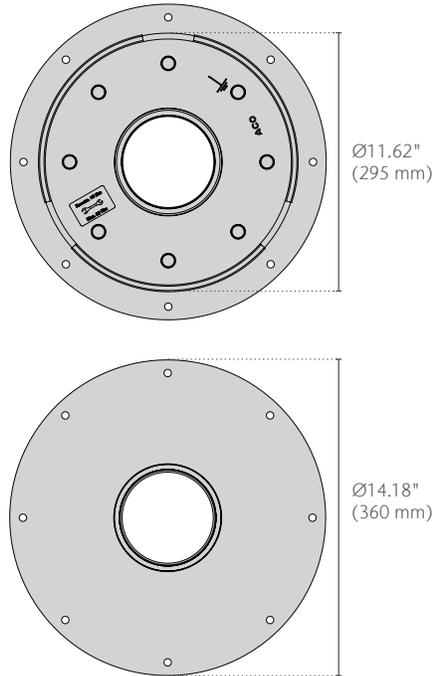

Product Name	Part No.	Outlet Size in (mm)	GPM	CFS	Weight lbs
Membrane No-Hub Drain - Stainless Steel	01043	4.33 (110)	79.25	0.18	8.9


Notes:

1. These are the pipe flow rates at the specified outlet, NOT channel flow rates.
2. Material is grade 304 stainless steel.
3. Outlet size: 4" SCH 40
4. Bolts are metric M8 x 1.25 bolt/nut thread and the nut takes a 13 mm wrench/socket to tighten to a recommended torque of 11 lb-ft (15 Nm).
5. Recommended for use with any channel that utilizes a 4" bottom knockout (ie. all SlabDrain channels and K100/KS100).
6. Installation will require a no hub coupler (not provided by ACO).

ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com
www.acousa.com

