


Hub Drain Spec Sheet

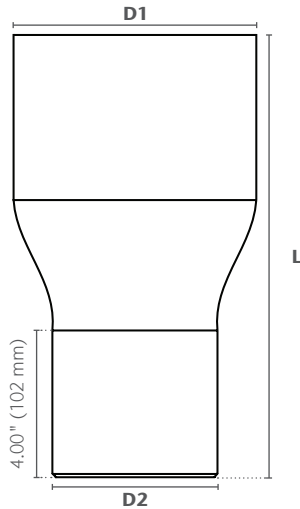

	Part No.	Diameter (D1) in (mm)	Diameter (D2) in (mm)	Length (L) in (mm)	Thickness	Material	Weight lbs
2" HUB DRAIN	448814	2.375 (60.3)	4.5 (114)	12 (305)	SCH 10 (2.8)	304	4.2
	448826	2.375 (60.3)	4.5 (114)	12 (305)	SCH 10 (2.8)	316L	4.2
	448820	2.375 (60.3)	4.5 (114)	12 (305)	SCH 40 (3.9)	304	7.2
	448832	2.375 (60.3)	4.5 (114)	12 (305)	SCH 40 (3.9)	316L	7.2
3" HUB DRAIN	448815	3.50 (89)	6.625 (168)	12 (305)	SCH 10 (3.1)	304	6.9
	448827	3.50 (89)	6.625 (168)	12 (305)	SCH 10 (3.1)	316L	6.9
	448821	3.50 (89)	6.625 (168)	12 (305)	SCH 40 (5.5)	304	13.2
4" HUB DRAIN	448833	3.50 (89)	6.625 (168)	12 (305)	SCH 40 (5.5)	316L	13.2
	448816	4.50 (114)	6.625 (168)	12 (305)	SCH 10 (3.1)	304	7.5
	448828	4.50 (114)	6.625 (168)	12 (305)	SCH 10 (3.1)	316L	7.5
6" HUB DRAIN	448822	4.50 (114)	6.625 (168)	12 (305)	SCH 40 (6)	304	14.9
	448834	4.50 (114)	6.625 (168)	12 (305)	SCH 40 (6)	316L	14.9
	448817	6.625 (168)	8.625 (219)	14 (356)	SCH 10 (3.4)	304	13.4
8" HUB DRAIN	448829	6.625 (168)	8.625 (219)	14 (356)	SCH 10 (3.4)	316L	13.4
	448823	6.625 (168)	8.625 (219)	14 (356)	SCH 40 (7.1)	304	27.7
	448835	6.625 (168)	8.625 (219)	14 (356)	SCH 40 (7.1)	316L	27.7
10" HUB DRAIN	448818	8.625 (219)	10.75 (273)	16 (406)	SCH 10 (3.8)	304	21.6
	448830	8.625 (219)	10.75 (273)	16 (406)	SCH 10 (3.8)	316L	21.6
	448824	8.625 (219)	10.75 (273)	16 (406)	SCH 40 (7.2)	304	46.0
	448836	8.625 (219)	10.75 (273)	16 (406)	SCH 40 (7.2)	316L	46.0
10" HUB DRAIN	448819	10.75 (273)	12.75 (324)	16 (406)	SCH 10 (4.2)	304	28.8
	448831	10.75 (273)	12.75 (324)	16 (406)	SCH 10 (4.2)	316L	28.8
	448825	10.75 (273)	12.75 (324)	16 (406)	SCH 40 (9.3)	304	60.0
	448837	10.75 (273)	12.75 (324)	16 (406)	SCH 40 (9.3)	316L	60.0

Specification Clause

ACO Hub Drain. Fully welded 304/316L SCH 10/SCH 40 with Outlet Diameter 2" - 10" and 2" concentrically increased top. Used with ACO Pipe, including Elbows, P-Traps or Long Swept P-Traps, which are available in the same thickness and grade material. Designed for direct discharge and gravity piping system. Contact ACO for optional trap primers, strainer baskets, covers, setting rings and custom sizes.


ACO recommends checking local plumbing codes prior to installation.

Optional assembly includes a FloorDrain installed flush with finished floor with Funnel Grate, which is replaceable if damaged.

ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com
www.acousa.com

