



# ACO Drain® FlowDrain FG200

8" Internal Width Fiberglass System

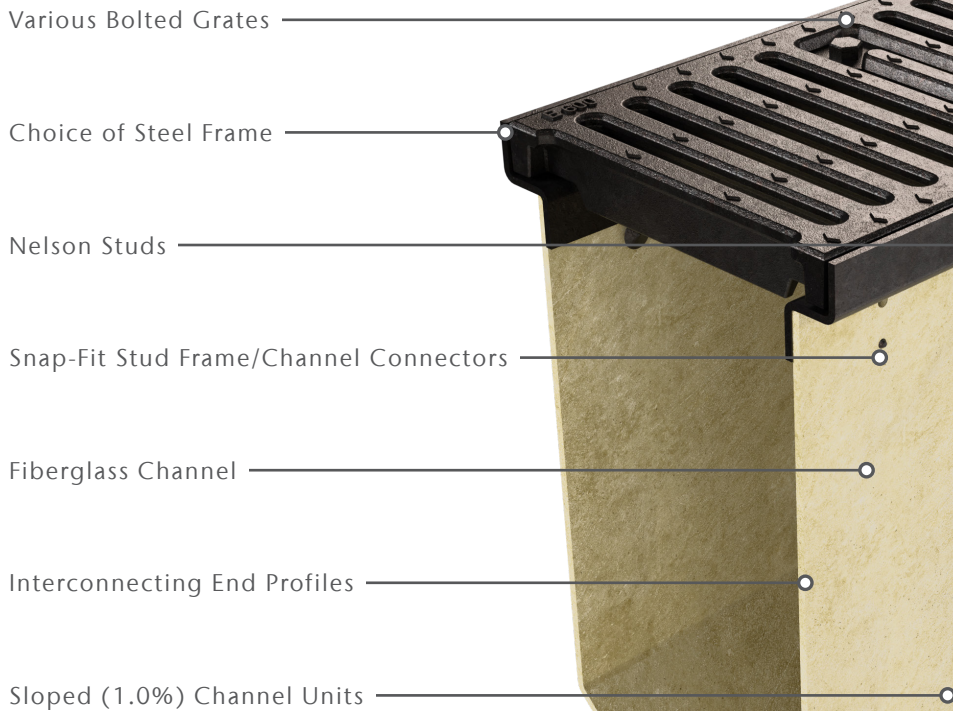

FG200 is an 8" wide sloping fiberglass system with a choice of steel slotted Class C (25 ton) or ductile iron Class E (60 ton) grates. Grates are bolted into the steel frame with 2 bolts per 18" section.

Accessories are available for pipe connections, catch basins, and closing the trench.

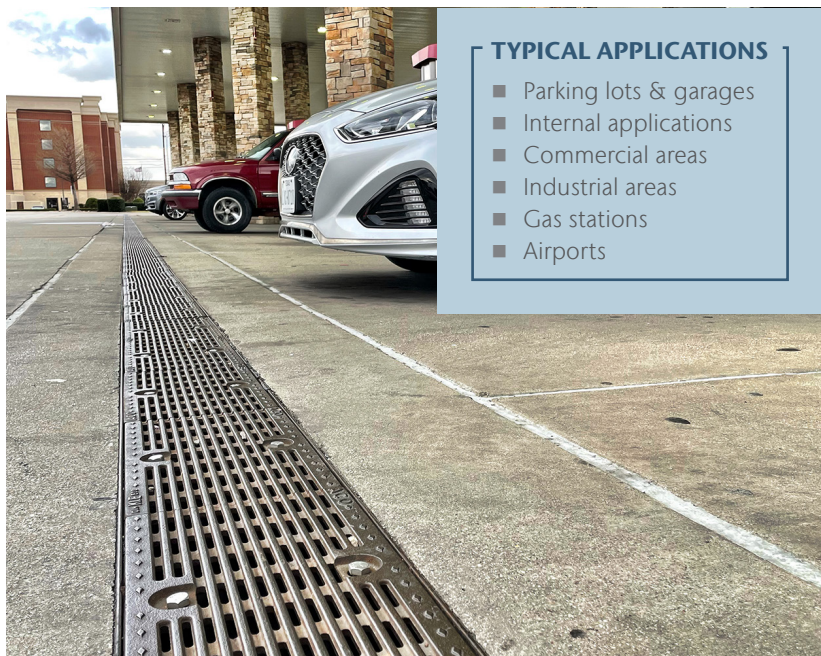

# ACO Drain® FlowDrain FG200

8" Internal Width Fiberglass System

## 4-BOLT LOCKING SYSTEM



Bolted FG200 grates offer mechanical, secure fixing of grates into the channel frame. Two bolts per 18" grate section lock into cross bars in the steel frame. Care must be taken to ensure that all bolts are secure and are not overtightened which can damage the frame.


BAR STEEL  
LOAD CLASS C

SLOTTED IRON  
LOAD CLASS E

LONGITUDINAL IRON  
LOAD CLASS E



## System Layout

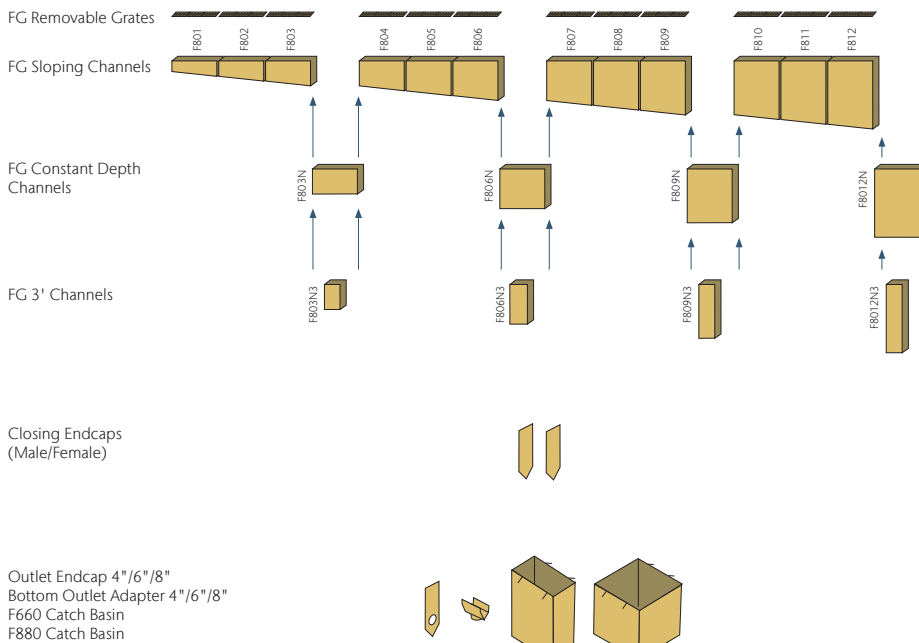

## ACO, Inc.

West Sales Office  
825 W. Beechcraft St.  
Casa Grande, AZ 85122  
Tel: (520) 421-9988  
Toll-Free: (888) 490-9552  
Fax: (520) 421-9899

Northeast Sales Office  
9470 Pinecone Dr.  
Mentor, OH 44060  
Tel: (440) 639-7230  
Toll-Free: (800) 543-4764  
Fax: (440) 639-7235

Southeast Sales Office  
481 Munn Rd.  
Suite 225  
Fort Mill, SC 29715  
Toll-Free: (800) 543-4764  
Fax: (803) 802-1063

info@acousa.com  
acoswm.com

For further technical info, design tools, and online chat support, visit [askaco.us](http://askaco.us)

© March 2023 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice. Print #DR412

ACO. we care for water

