


Access Unit

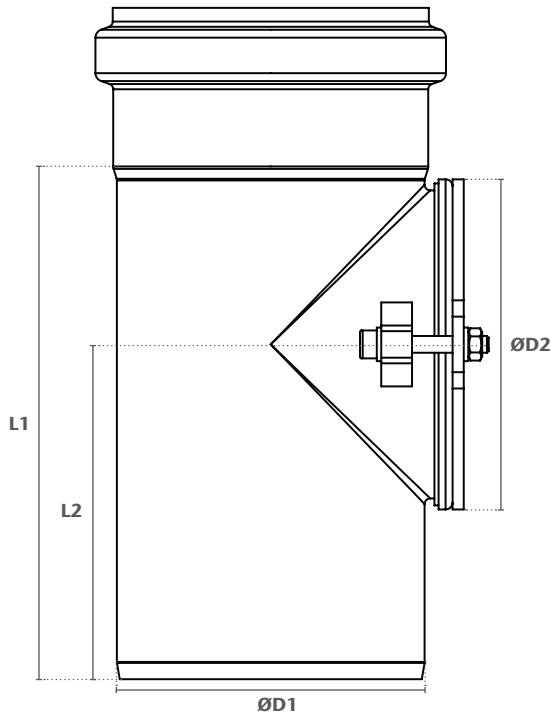

Part No.	Length (L1) in (mm)	Length (L2) in (mm)	ØD1 in (mm)	ØD2 in (mm)	Gasket Material	Pipe Material	Weight lbs
98963	5.12 (130)	3.55 (90)	2.95 (75)	2.95 (75)	EPDM	316L	1.5
98965	7.21 (183)	4.61 (117)	4.33 (110)	4.33 (110)	EPDM	316L	2.9
419785	8.27 (210)	5.32 (135)	4.92 (125)	4.33 (110)	EPDM	316L	3.5
98967-BD	11.34 (288)	7.25 (184)	6.30 (160)	6.30 (160)	EPDM	316L	6.8
419678	11.54 (293)	7.33 (186)	7.87 (200)	6.30 (160)	EPDM	316L	8.7
417128	11.42 (290)	7.25 (184)	9.84 (250)	6.30 (160)	EPDM	316L	11.2
417214	13.39 (340)	8.98 (228)	12.40 (315)	6.30 (160)	EPDM	316L	19.6


Specification Summary

Used with ACO Pipe System. Used as an inspection port into the piping system for cleaning and maintenance. Made from AISI 316L. Resistant to thermal and dynamic shocks. Rodent-proof and sagproof. Non-combustible. Double-lipped seal push-fit connection. Designed for gravity piping system with maximum working pressure of 0.5 bar. Socket clamps, NBR and FPM gasket material also available upon request. Socket clamp can increase maximum operating pressure to 0.7 bar. ACO recommends checking local plumbing codes prior to installation. Manufactured to EN 1124-1 and 1124-2.

ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com
www.acousa.com

