




Support Brackets




Support Bracket with Rubber Infill



Support Bracket with Rubber Infill and Stirrup



Support Bracket with Rubber Infill and Key

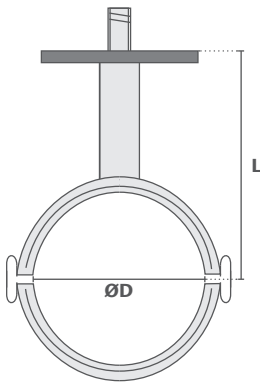

	Part No.	ØD in (mm)	Pipe Material	Weight lbs
Support Bracket with Rubber Infill	417359	1.57 (40)	316L	0.3
	400529	1.97 (50)	316L	0.3
	400530	2.95 (75)	316L	0.5
	400531	4.33 (110)	316L	0.7
	419855	4.92 (125)	316L	0.8
	400532	6.30 (160)	316L	0.9
	419675	7.87 (200)	316L	1.0
	417149	9.84 (250)	316L	1.3
	417224	12.40 (315)	316L	2.2


	Part No.	ØD in (mm)	Length (L) in (mm)	Pipe Material	Weight lbs
Support Bracket with Rubber Infill and Stirrup	417358	1.57 (40)	2.2 (56)	316L	0.4
	400537	1.97 (50)	2.2 (56)	316L	0.4
	400538	2.95 (75)	3.1 (80)	316L	0.6
	400539	4.33 (110)	4.6 (116)	316L	0.9
	400540	6.30 (160)	6.5 (166)	316L	1.2

	Part No.	ØD in (mm)	Length (L) in (mm)	Pipe Material	Weight lbs
Support Bracket with Rubber Infill and Key	417361	1.57 (40)	4.7 (120)	316L	0.6
	400545	1.97 (50)	4.7 (120)	316L	0.6
	400546	2.95 (75)	5.2 (133)	316L	0.8
	400547	4.33 (110)	5.9 (150)	316L	1.0
	400548	6.30 (160)	6.9 (175)	316L	1.2

Support Brackets



Plate for Axial Fixing

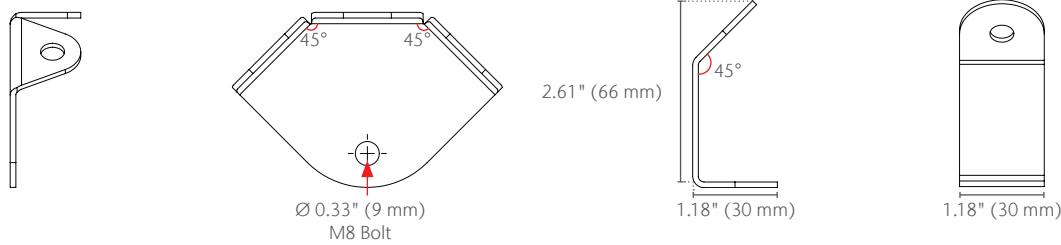

Pipe Threaded Support Pole



	Part No.	Pipe Material	Weight lbs
Plate for Axial Fixing	400561	316L	0.24

	Part No.	Diameter (D) in (mm)	Length (L) in (mm)	Pipe Material	Weight lbs
Pipe Threaded Support Pole	400557	M8	40 (1000 mm)	Galv. Steel	0.7
	400558	M8	3.5 (90 mm)	Galv. Steel	0.2
	400559	M8	1.5 (40 mm)	Galv. Steel	0.2
	400553	M8	40 (1000 mm)	316L	0.7
	400554	M8	3.5 (90 mm)	316L	0.2
400555	M8	1.5 (40 mm)	316L	0.2	


Specification Summary

Used with ACO Pipe System. Used to secure ACO Pipe to the wall, floor or ceiling. Made from AISI 316L. Noncombustible. Designed for gravity piping system with maximum working pressure of 0.5 bar. Socket clamps, NBR and FPM gasket material also available upon request. Socket clamp can increase maximum operating pressure to 0.7 bar. ACO recommends checking local plumbing codes prior to installation. Manufactured to EN 1124-1 and 1124-2.

ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com
www.acousa.com

