


# P-Trap Spec Sheet

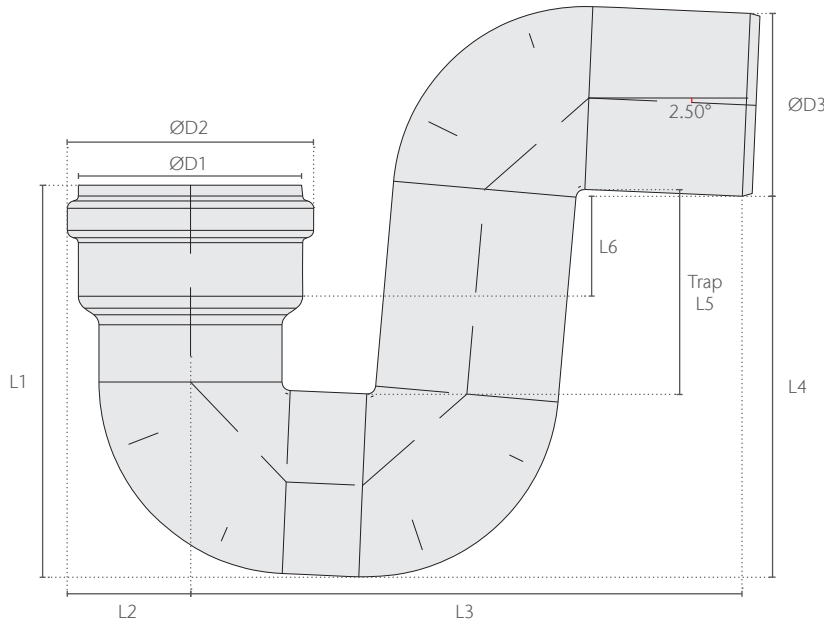

| Parts           | Part No.      | Outer ØD1<br>in (mm) | ØD2<br>in (mm) | ØD3<br>in (mm) | Length (L1)<br>in (mm) | Length (L2)<br>in (mm) | Length (L3)<br>in (mm) | Length (L4)<br>in (mm) | Length (L5)<br>in (mm) | Length (L6)<br>in (mm) | Material  | Gasket<br>Material | Weight<br>lbs |
|-----------------|---------------|----------------------|----------------|----------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|-----------|--------------------|---------------|
| Pipe 2" (50mm)  | <b>417487</b> | 2.36 (60)            | 2.83 (72)      | 1.97 (50)      | 5.12 (130)             | 1.42 (36)              | 7.52 (191)             | 4.87 (124)             | 3.08 (78)              | 1.15 (29)              | AISI 316L | EPDM               | 1.3           |
| Pipe 3" (75mm)  | <b>417488</b> | 3.50 (89)            | 3.97 (101)     | 2.95 (75)      | 6.32 (160)             | 1.99 (50)              | 8.90 (226)             | 6.14 (156)             | 3.38 (86)              | 1.61 (41)              | AISI 316L | EPDM               | 2.4           |
| Pipe 4" (110mm) | <b>417489</b> | 4.50 (114)           | 5.09 (129)     | 4.33 (110)     | 8.39 (152)             | 2.55 (65)              | 11.73 (298)            | 7.87 (200)             | 3.74 (95)              | 2.05 (52)              | AISI 316L | EPDM               | 4.2           |
| Pipe 6" (160mm) | <b>417490</b> | 6.63 (168)           | 7.30 (185)     | 6.30 (160)     | 11.21 (285)            | 3.65 (93)              | 15.57 (395)            | 10.17 (258)            | 4.12 (105)             | 1.93 (49)              | AISI 316L | EPDM               | 10.9          |

| Parts           | Part No.     | Outer ØD1<br>in (mm) | ØD2<br>in (mm) | ØD3<br>in (mm) | Length (L1)<br>in (mm) | Length (L2)<br>in (mm) | Length (L3)<br>in (mm) | Length (L4)<br>in (mm) | Length (L5)<br>in (mm) | Length (L6)<br>in (mm) | Material  | Gasket<br>Material | Weight<br>lbs |
|-----------------|--------------|----------------------|----------------|----------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|-----------|--------------------|---------------|
| Pipe 2" (50mm)  | <b>98872</b> | 1.97 (50)            | 2.83 (72)      | 1.97 (50)      | 4.45 (113)             | 1.22 (31)              | 7.65 (194)             | 5.28 (134)             | 3.48 (88)              | 2.64 (67)              | AISI 316L | EPDM               | 1.1           |
| Pipe 3" (75mm)  | <b>98874</b> | 2.95 (75)            | 3.43 (87)      | 2.95 (75)      | 6.63 (143)             | 1.73 (44)              | 9.13 (232)             | 6.30 (160)             | 3.46 (88)              | 2.80 (71)              | AISI 316L | EPDM               | 2.2           |
| Pipe 4" (110mm) | <b>98876</b> | 4.33 (110)           | 4.92 (125)     | 4.33 (110)     | 7.40 (188)             | 2.48 (63)              | 11.69 (297)            | 7.95 (202)             | 3.78 (96)              | 2.87 (73)              | AISI 316L | EPDM               | 3.9           |
| Pipe 6" (160mm) | <b>98878</b> | 6.30 (160)           | 7.00 (178)     | 6.29 (160)     | 9.84 (250)             | 3.50 (89)              | 15.67 (398)            | 10.35 (263)            | 4.25 (108)             | 3.35 (85)              | AISI 316L | EPDM               | 10.2          |

## Specification Summary


Used with SCH Pipe and ACO pipe. Made from AISI 316L. Rodent-proof. Non-combustible. Double-lipped seal push-fit connection. Designed for gravity piping system with maximum working pressure of 0.5 bar. Socket Clamps, FPM and NBR gasket material also available upon request in certain sizes. Socket clamp can increase maximum operating pressure. Manufactured to EN 1124-1 and 1124-2.

ACO recommends checking local plumbing codes prior to installation.

## ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com  
www.acousa.com

