
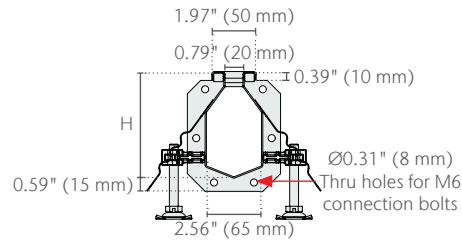
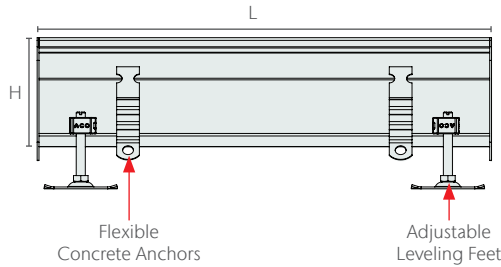


# SlotDrain 20 - Neutral Unit Channels

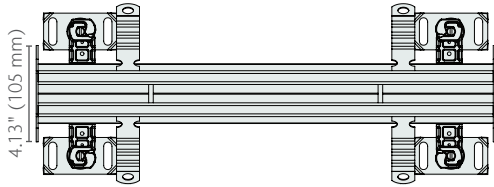

Part No.	Material	Height (H) in (mm)	Length (L) in (mm)	Weight lbs.
92300	AISI 304	2.76 (70)	19.69 (500)	5.07
92301	AISI 304	3.54 (90)	19.69 (500)	5.73
92302	AISI 304	4.72 (120)	19.69 (500)	6.39
92305	AISI 304	2.76 (70)	39.37 (1000)	8.16
92306	AISI 304	3.54 (90)	39.37 (1000)	9.26
92307	AISI 304	4.72 (120)	39.37 (1000)	11.02
92310	AISI 304	2.76 (70)	78.74 (2000)	14.77
92311	AISI 304	3.54 (90)	78.74 (2000)	16.98
92312	AISI 304	4.72 (120)	78.74 (2000)	20.06
92316	AISI 304	2.76 (70)	118.11 (3000)	21.61
92317	AISI 304	3.54 (90)	118.11 (3000)	24.91
92318	AISI 304	4.72 (120)	118.11 (3000)	29.76

Part No.	Material	Height (H) in (mm)	Length (L) in (mm)	Weight lbs.
92350	AISI 316L	2.76 (70)	19.69 (500)	5.07
92351	AISI 316L	3.54 (90)	19.69 (500)	5.73
92352	AISI 316L	4.72 (120)	19.69 (500)	6.39
92355	AISI 316L	2.76 (70)	39.37 (1000)	8.16
92356	AISI 316L	3.54 (90)	39.37 (1000)	9.26
92357	AISI 316L	4.72 (120)	39.37 (1000)	11.02
92360	AISI 316L	2.76 (70)	78.74 (2000)	14.77
92361	AISI 316L	3.54 (90)	78.74 (2000)	16.98
92362	AISI 316L	4.72 (120)	78.74 (2000)	20.06
92366	AISI 316L	2.76 (70)	118.11 (3000)	21.61
92367	AISI 316L	3.54 (90)	118.11 (3000)	24.91
92368	AISI 316L	4.72 (120)	118.11 (3000)	29.76

## Specification Summary


ACO SlotDrain 20 neutral unit channels. Overall length and height varies, see tables. Made from 16 ga (1.5 mm) AISI 304 or AISI 316L, pickle passivated finish. All channels provided with NBR seal and connection bolts on one side. Number of concrete anchors and adjustable leveling feet varies by channel length.

ACO recommends checking local plumbing codes prior to installation.

## ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com  
www.acousa.com

