


# Climate Tunnel




## Climate Tunnel Entrance

part no. 11124


Top



Front




Side



## Climate Plate

part no. 11127

Top



Front




Side




## Stepdown Plate

part no. 11129


Top



Front




Side



## Climate Tunnel Entrance Right

part no. 11125


Top

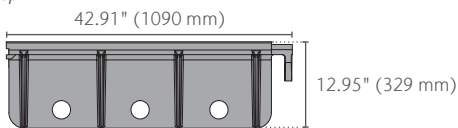

Front




Side



## Climate Tunnel Entrance Left

part no. 11126


Top

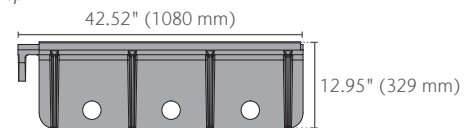

Front



Side



# Climate Tunnel



Parts	Part No.	Length in (mm)	Width in (mm)	Weight lbs
Climate Tunnel Entrance	<b>11124</b>	39.37 (1000)	39.37 (1000)	626.0
Climate Tunnel Entrance Right	<b>11125</b>	42.91 (1090)	12.95 (329)	149.0
Climate Tunnel Entrance Left	<b>11126</b>	42.52 (1080)	12.95 (329)	147.0
Climate Plate	<b>11127</b>	18.90 (480)	18.90 (480)	35.3
Stepdown Plate	<b>11129</b>	22.83 (580)	11.81 (300)	15.2

*Slotted upper surface enables airflow to ensure climatic conditions remain constant.  
 Polymer concrete build is resistant to freeze-thaw cycles due to low water absorption rate.  
 Smooth surface for amphibians to pass safely through the tunnel with no risk of injury.  
 Flush with road surface.*

## Specification Summary

### General

The tunnel and fencing system shall be ACO Wildlife KT500 Tunnel, Fence and Entrance as manufactured by ACO, Inc.

### Installation

The tunnel and fencing system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

### Materials


The climate tunnel system shall be manufactured from polymer concrete with the minimum properties as follows:

- Compressive strength - 13,053 psi
- Flexural strength - 3,191 psi
- Water absorption rate: 0.07%
- Resistant to dilute acid and alkali
- Frost-proof
- Salt-proof

## ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com  
www.acousa.com

