


# F660 Stainless Steel Bar Grate Spec Sheet



Top

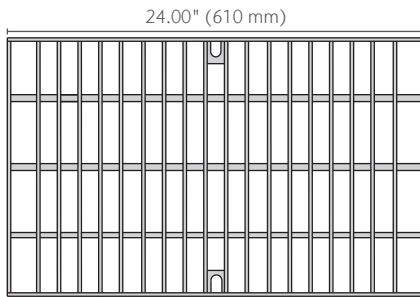

Side



Front



Product Name	Part No.	Length in (mm)	Width in (mm)	Weight lbs
F660 Stainless Steel Bar Grate	<b>97442</b>	24.00 (610)	14.75 (375)	35.2
Replacement Stainless Steel Socket Head Bolts (Qty 4)	<b>93897</b>	-	-	0.4

## Specification Summary

### General

The surface drainage system shall be ACO Drain F660 catch basin complete with ACO F660 Stainless Steel Bar Grate with boltlocking as manufactured by ACO, Inc. or similar approved.

### Materials

The covers shall be manufactured from stainless steel and have minimum properties as follows:

- Intake area of 267.0 in<sup>2</sup> (1,722.5 cm<sup>2</sup>) per 24" of grate.


The overall width of 14.75" (375 mm) and overall length of 24.00" (610 mm). Slots measure 3.30" (84 mm) by 1.00" (25 mm) and 3.00" (76 mm) by 1.00" (25 mm).

### Grates

Grate is bar stainless steel. Stainless steel ASTM 536 - Grade 80-55-06. After removal of the grates there shall be uninterrupted access to the trench to aid maintenance.

### Installation


The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.



## ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com  
www.acousa.com

