



FG200 Bar Stainless Steel Grate Spec Sheet




Top

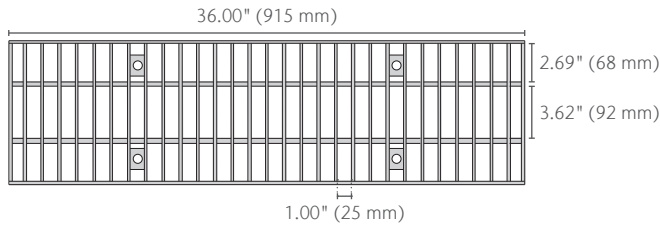

Side



Front



Product Name	Part No.	Length in (mm)	Width in (mm)	Weight lbs
FG200 Bar Stainless Steel Grate	93891	36.00 (915)	10.00 (254)	28.6
Replacement Stainless Steel Socket Head Bolts (Qty 4)	93897	-	-	0.4

Specification Summary

General

The surface drainage system shall be ACO Drain FG200 channels complete with ACO FG200 Bar Stainless Steel Grate with boltlocking as manufactured by ACO, Inc. or similar approved.

Materials

The covers shall be manufactured from stainless steel and have minimum properties as follows:

- Grade 304 stainless steel
- Intake area of 264.0 in² (1,703.2 cm²) per 36.00" of grate.

The overall width of 10.00" (254 mm) and overall length of 36.00" (915 mm). Slots measure 3.62" (92 mm) by 1.00" (25 mm) and 2.69" (68 mm) by 1.00" (25 mm).

Grates

Grate is bar stainless steel. Stainless steel ASTM 536 - Grade 80-55-06. After removal of the grates there shall be uninterrupted access to the trench to aid maintenance.

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.




EN 1433 Load Class C
56,202 lbs – 1,160 psi

ACO, Inc.

© January 2026 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.



info@acousa.com
www.acousa.com

