


# ShowerPoint with Quadrato grate

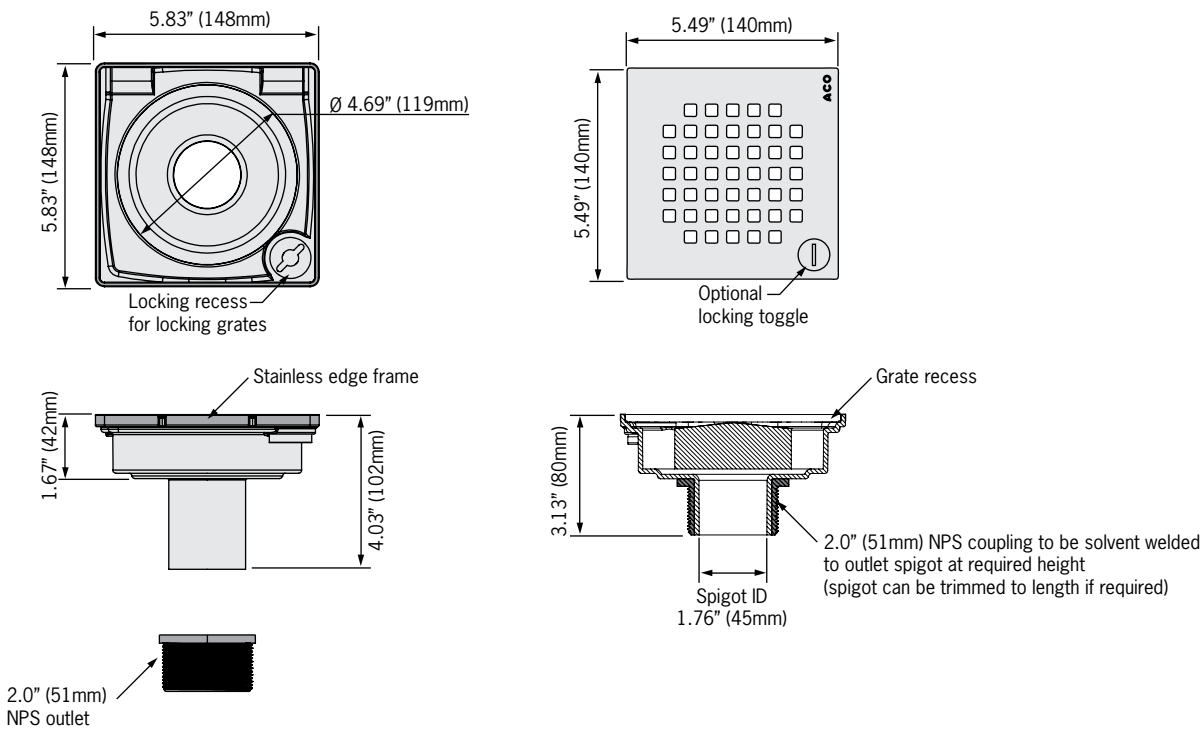

## Product Table

Length (mm) inches	ShowerPoint body w/ Quadrato locking grate	ShowerPoint body w/ Quadrato non-locking grate	Optional LED light Red	Optional LED light Green	Optional LED light Blue	Optional LED light White
Part No.	37233	37225	37286	37258	37259	37257
Weight lbs	1.6	1.6	0.5	0.5	0.5	0.5

## Specification Clause

The ACO ShowerPoint shower outlet body shall be chrome plated ABS plastic as manufactured by ACO, Inc. USA. A decorative stainless steel edge frame shall also be provided. The locking\*/ non-locking\* grate shall be manufactured from grade 304 stainless steel with 'Quadrato' slot style.

Shower outlet shall be 5.83" (148mm) square, with 50mm (2.0") diameter outlet spigot (O.D.). Grate shall provide a minimum intake area of 4.9 square inches. Outlet shall provide minimum outlet flow rate of 9.5GPM where installed to allow 0.2" (5mm) head of water OR 17.4GPM where installed to allow 0.6" (15mm) head of water.

Connection to plumbing shall be either with 2" NPS threaded coupling (supplied with outlet) that shall be solvent welded to outlet spigot\*/ 2" no-hub adjustable coupling (available from ACO or others)\*, or a solvent weld connection\*.

ACO recommends checking local plumbing codes prior to installation.

The system shall be installed in accordance with the manufacturer's instructions and recommendations.

\*Delete as necessary

### ACO, Inc.

**West Sales Office**  
825 W. Beechcraft St.  
Casa Grande, AZ 85122  
Tel: (520) 421-9988  
Toll Free: (888) 490-9552  
Fax: (520) 421-9899

**East Sales Office**  
9470 Pinecone Dr.  
Mentor, OH 44060  
Tel: (440) 639-7230  
Toll free: (800) 543-4764  
Fax: (440) 639-7235

**Southeast Sales Office**  
4211 Pleasant Rd  
Ft. Mill, SC 29708  
Tel: (800) 543-4764  
Toll Free: (800) 662-2377  
Fax: (803) 802-1063

#### Follow us on



**Electronic Contact:**  
usashowerdrain@aco.com  
www.acousa.com/showerdrain

