



BoxDrain Grates - Slot Cover

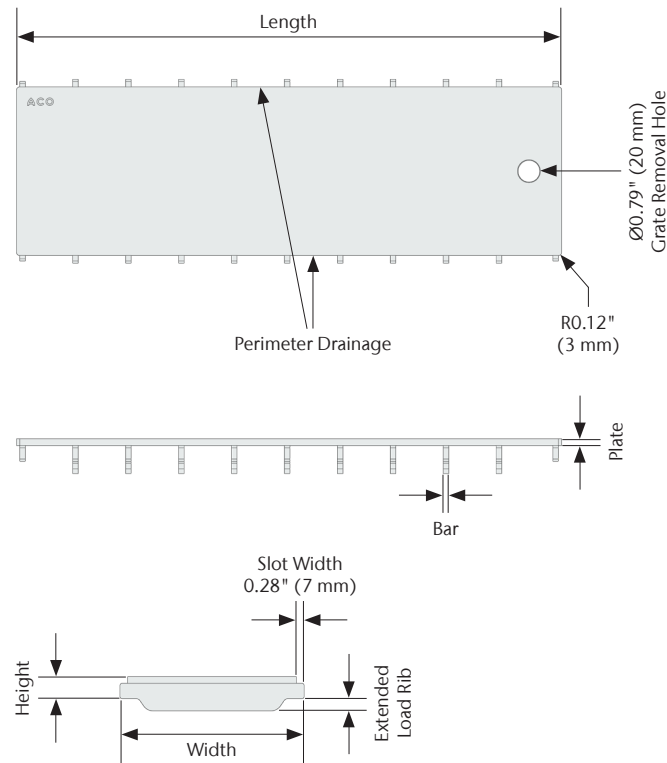

Specification Clause

ACO BoxDrain Slot Cover Grates. Used with ACO BoxDrain Channels. Made from AISI 304 or 316L grade stainless steel with electropolish finish. Fully welded hygienic joints. Fully drainable, inspectable and cleanable. Load Class Per ASME A112.6.3. Certified to NSF/ANSI-3-a Standard 14159-1.

ACO recommends checking local plumbing codes prior to installation.

Parts	Part No.	Width in (mm)	Length in (mm)	Height in (mm)	Plate in (mm)	Bar in (mm)	Grate Material	Weight lbs.	EN1253 Load Class	ASME Load Class	Extended Load Rib
Slot Cover Grate - BoxDrain 150	445816	4.65 (118)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	6.2	R50	Light Duty	Y
	445818	4.65 (118)	19.69 (500)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 304	7.1	M125	Medium Duty	Y
	445820	4.65 (118)	19.69 (500)	0.79 (20)	0.31 (8)	0.20 (5)	AISI 304	9.7	N250	Heavy Duty	Y
	445817	4.65 (118)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	6.2	R50	Light Duty	Y
	445819	4.65 (118)	19.69 (500)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 316L	7.1	M125	Medium Duty	Y
445821	4.65 (118)	19.69 (500)	0.79 (20)	0.31 (8)	0.20 (5)	AISI 316L	9.7	N250	Heavy Duty	Y	
Slot Cover Grate - BoxDrain 200	445756	6.61 (168)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	8.8	R50	Light Duty	Y
	445762	6.61 (168)	15.75 (400)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	7.3	R50	Light Duty	Y
	445758	6.61 (168)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	9.7	M125	Medium Duty	Y
	445764	6.61 (168)	15.75 (400)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	8.2	M125	Medium Duty	Y
	445760	6.61 (168)	19.69 (500)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 304	11.5	N250	Heavy Duty	Y
	445766	6.61 (168)	15.75 (400)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 304	9.1	N250	Heavy Duty	Y
	445757	6.61 (168)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	8.8	R50	Light Duty	Y
	445763	6.61 (168)	15.75 (400)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	7.3	R50	Light Duty	Y
	445759	6.61 (168)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	9.7	M125	Medium Duty	Y
	445765	6.61 (168)	15.75 (400)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	8.2	M125	Medium Duty	Y
445761	6.61 (168)	19.69 (500)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 316L	11.5	N250	Heavy Duty	Y	
445767	6.61 (168)	15.75 (400)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 316L	9.1	N250	Heavy Duty	Y	
Slot Cover Grate - BoxDrain 300	445768	10.55 (268)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	15.2	R50	Light Duty	Y
	445774	10.55 (268)	11.81 (300)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	9.1	R50	Light Duty	Y
	445770	10.55 (268)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	15.7	M125	Medium Duty	Y
	445776	10.55 (268)	11.81 (300)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 304	9.5	M125	Medium Duty	Y
	445772	10.55 (268)	19.69 (500)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 304	18.7	N250	Heavy Duty	Y
	445778	10.55 (268)	11.81 (300)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 304	11.3	N250	Heavy Duty	Y
	445769	10.55 (268)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	15.2	R50	Light Duty	Y
	445775	10.55 (268)	11.81 (300)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	9.1	R50	Light Duty	Y
	445771	10.55 (268)	19.69 (500)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	15.7	M125	Medium Duty	Y
	445777	10.55 (268)	11.81 (300)	0.79 (20)	0.20 (5)	0.20 (5)	AISI 316L	9.5	M125	Medium Duty	Y
445773	10.55 (268)	19.69 (500)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 316L	18.7	N250	Heavy Duty	Y	
445779	10.55 (268)	11.81 (300)	0.79 (20)	0.24 (6)	0.20 (5)	AISI 316L	11.3	N250	Heavy Duty	Y	

ACO, Inc.

West Sales Office  
825 W. Beechcraft Street  
Casa Grande, AZ 85122  
Tel: (520) 421-9988  
Toll-Free: (888) 490-9552  
Fax: (520) 421-9899

Northeast Sales Office  
9470 Pinecone Drive  
Mentor, OH 44060  
Tel: (440) 639-7230  
Toll-Free: (800) 543-4764  
Fax: (440) 639-7235

Southeast Sales Office  
481 Munn Road  
Suite 225  
Fort Mill, SC 29715  
Toll-Free: (800) 543-4764  
Fax: (803) 802-1063

info@acousa.com  
www.acousa.com

© March 2023 ACO, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO, Inc. reserves the right to change products and specifications without notice.

ACO. we care for water

