

SPECIFICATION CLAUSE

SPORT 4000

GENERAL

THE SURFACE DRAINAGE SYSTEM SHALL BE POLYMER CONCRETE SYSTEM 4000 CHANNEL SYSTEM AS MANUFACTURED BY ACO, INC.

MATERIALS

CHANNELS SHALL BE MANUFACTURED FROM POLYESTER RESIN POLYMER CONCRETE. MINIMUM PROPERTIES OF POLYMER CONCRETE WILL BE AS FOLLOWS:

COMPRESSIVE STRENGTH:	13,000 PSI
FLEXURAL STRENGTH:	3,200 PSI
TENSILE STRENGTH:	1,500 PSI
WATER ABSORPTION:	0.07%
FROST PROOF	YES
DILUTE ACID AND ALKALI RESISTANT	YES
B117 SALT SPRAY TEST COMPLIANT	YES


THE SYSTEM SHALL BE 4" (100mm) NOMINAL INTERNAL WIDTH AND A 6.1" (155mm) OVERALL WIDTH. ALL CHANNELS SHALL BE INTERLOCKING WITH A MALE/FEMALE JOINT.

4002 CHANNEL : INVERT DEPTH - 4.65"
 4010 CHANNEL : INVERT DEPTH - 6.54"
 4020 CHANNEL : INVERT DEPTH - 8.90"
 4030 CHANNEL : INVERT DEPTH - 11.26"

STANDARD ACO DRAIN GRATES AND LOCKING DEVICES ARE USED, SEE SEPARATE SPECIFICATION SHEETS FOR INFORMATION.

THE COMPLETE DRAINAGE SYSTEM SHALL BE BY ACO, INC. ANY DEVIATION OR PARTIAL SYSTEM DESIGN AND/OR IMPROPER INSTALLATION WILL VOID ANY AND ALL WARRANTIES PROVIDED BY ACO, INC.

THE SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS. REFER TO ARCHITECT'S PLANS FOR TRENCH AND CATCH BASIN LOCATION.

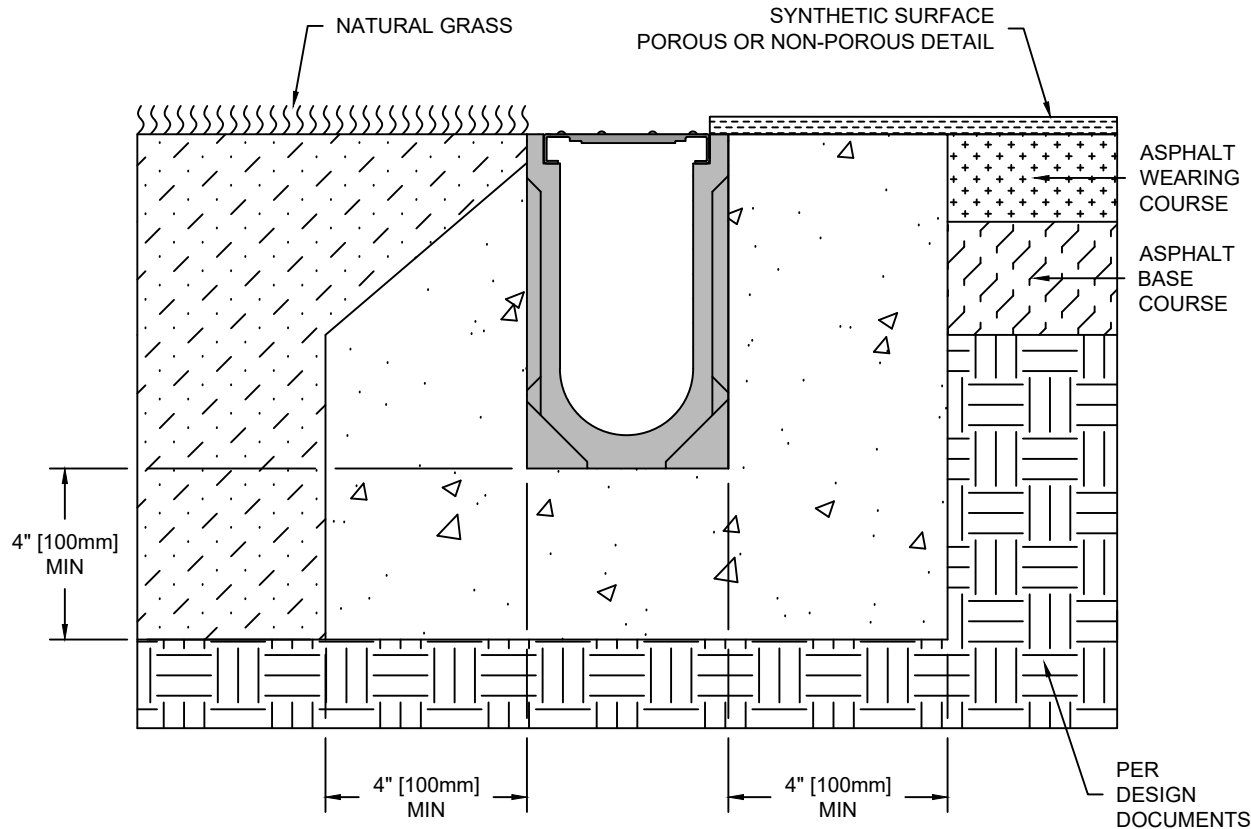

NOTES:

1. IT IS NECESSARY TO ENSURE MINIMUM DIMENSIONS SHOWN ARE SUITABLE FOR EXISTING GROUND CONDITIONS. *ENGINEERING ADVICE MAY BE REQUIRED.*
2. MINIMUM CONCRETE STRENGTH OF 4,000 PSI IS RECOMMENDED. CONCRETE SHOULD BE VIBRATED TO ELIMINATE AIR POCKETS.
3. EXPANSION AND CONTRACTION CONTROL JOINTS AND REINFORCEMENT ARE RECOMMENDED TO PROTECT CHANNEL AND CONCRETE SURROUND. *ENGINEERING ADVICE MAY BE REQUIRED.*
4. REFER TO ACO'S LATEST INSTALLATION INSTRUCTIONS FOR FURTHER DETAILS.

S4000-FPCGS



DATE: 12/18/25

SYSTEM 4000:
 Full/Partial Concrete, Grass & Synthetic Surface Overlay

INSTALLATION DRAWING - ACO SPORT

ACO, Inc.

825 W. Beechcraft St
 Casa Grande, AZ 85122
 Tel: 520-421-9988
 Fax: 520-421-9899

P.O. Box 245
 Chardon, OH 44024
 Tel: 440-285-7000
 Fax: 440-285-8517

481 Munn Rd. Suite #225
 Fort Mill, SC 29715
 Tel: 440-639-7230
 Fax: 803-802-1063